

Infiled AR4.6sPlus LED System

AR4.6sPlus Blackface Outdoor LED System


Pixel Pitch - real:	4,6 mm
LED Konfiguration:	3-IN-1 SMD 1818 Full Black - Blackface
IC Treiber:	MBI 5253
Receiving Card:	NOVA A10S PRO - HDR
Pixel pro Quadratmeter:	46.656 pixel
Pixel per Modul:	108 x 108 (500 x 500 mm Cabinet) 108 x 216 (500 x 1000 mm Cabinet)
Helligkeit:	> 4.500 nits, HDR
Wiederholrate:	> 3.800 Hz
Grauskalierung:	16 bit
Betrachtungswinkel:	140° h/v
IP Zertifizierung:	IP 65
Leistungsaufnahme:	max. 600 W je qm / ø 200 W je qm
Steckverbinder Power:	Neutrik® powerCON TRUE1
Steckverbinder Data:	Neutrik® etherCON
Spannung:	AC 100 - 264 volts
Abmessungen:	500 x 500 / 500 x 1000 mm (B x H)
Gewicht:	8,5 kg (500 x 500 mm Cabinet) 12,5 kg (500 x 1000 mm Cabinet)
Cabinet Material:	Aluminium
Zertifizierungen:	CE, EMV, LVD, Fireproof
Montage:	Easy Locks for One-Hand-Operation Magnetic positioning for One-Person-Handling

Controller

Typ:	Nova MCTRL660PRO / MCTRL4K / MX Series
Inputs:	DVI / HDMI / DP / SDI
Unterstützte Auflösungen:	3840 x 2160 / 2048 x 1152 / 2560 x 960 / 1920 x 1200 / Custom Resolutions
Grauskalierung:	18 bit
Video Formate:	RGB, YCrCb4:2:2, YCrCb4:4:4
Sending Card:	Novastar / integriert
Outputs:	RJ45, HDMI/external Audio
Software:	NovaLCT LED (Windows)

Flyware & Stacking

Hanging Brackets:	Single hanging brackets 500 mm Double hanging brackets 1000 mm
Windload Frame:	Custom Windload Frame inkl. Statik
Ground Stacking:	Custom Ground Stacking inkl. Statik

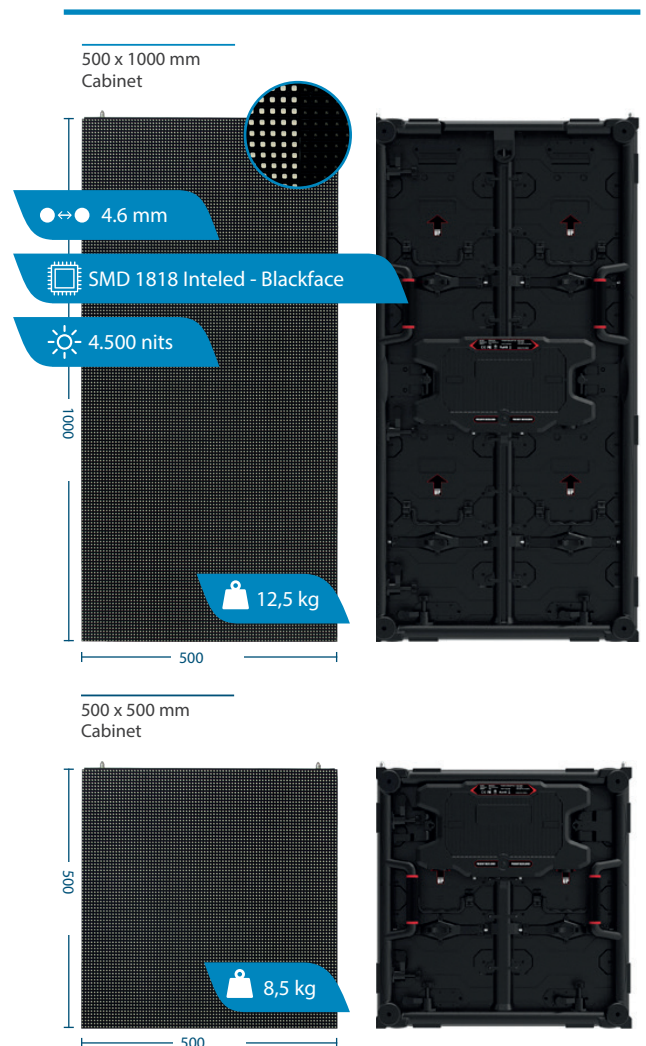

Neutrik®
powerCON TRUE1



Neutrik®
etherCON



Magnetische
Positionierung



Easy Locks

